NUMBERED NOTES

01	WALL OUTLET DEDICATED FOR ELEVATOR PHONE LINE. COORDINATE EXACT LOCATION WITH THE ELEVATOR VENDOR.
02	HALL CALL ELEVATOR CARD READER CONTROL
03	WALL OUTLET FOR MECHANICAL CONTROLS PANEL.
04	LOCATION OF CAMERA MONITOR FOR DINING ROOM.

SHEET NOTES

A. REFER TO SHEET T0.01 FOR ABBREVIATIONS, GENERAL NOTES, AND SYMBOL DEFINITIONS.

B. REFER TO SHEET T0.02 FOR PRIMARY PATHWAY REQUIREMENTS AND DEFINITIONS.

C. REFER TO SHEET T0.03 AND T0.04 FOR OUTLETS/DEVICES SECONDARY PATHWAY AND CABLING REQUIREMENTS.

D. SERVE OUTLETS/DEVICES ON THIS SHEET FROM TELECOM ROOMS AS NOTED.

E. REFER TO ARCHITECTURAL PLANS FOR EXACT LOCATIONS OF OUTLETS/DEVICES, WHERE SHOWN. OUTLETS/DEVICES ON THIS SHEET ARE SHOWN DIAGRAMMATICALLY.

F. REFER TO SECURITY INSTALLATION DETAILS FOR SECONDARY PATHWAY REQUIREMENTS, SYSTEM INTERFACES, AND COMPONENT CONFIGURATIONS.


G. PATHWAYS SHOWN ARE DEDICATED FOR TECHNOLOGY CABLING.

H. INSTALL SECONDARY PATHWAYS ALONG THE MOST DIRECT ROUTES TO PRIMARY PATHWAYS OR SERVING ROOM.

I. INSTALL HORIZONTAL CABLES ALONG THE MOST DIRECT PRIMARY PATHWAY ROUTE TO THE SERVING TELECOM ROOM.

J. PROVIDE APPROVED FIRESTOP SYSTEMS AT PENETRATIONS THROUGH FIRE BARRIERS, SMOKE BARRIERS, AND SMOKE PARTITIONS TO MAINTAIN RATINGS.

K. PROVIDE AN ALLOWANCE OF (2) CATEGORY 6A DROPS PER 1000 SQUARE FEET FOR WIRELESS ACCESS POINTS. DESIGN OF WIRELESS ACCESS POINTS TO BE COORDINATED WITH OWNERS IT DEPARTMENT.

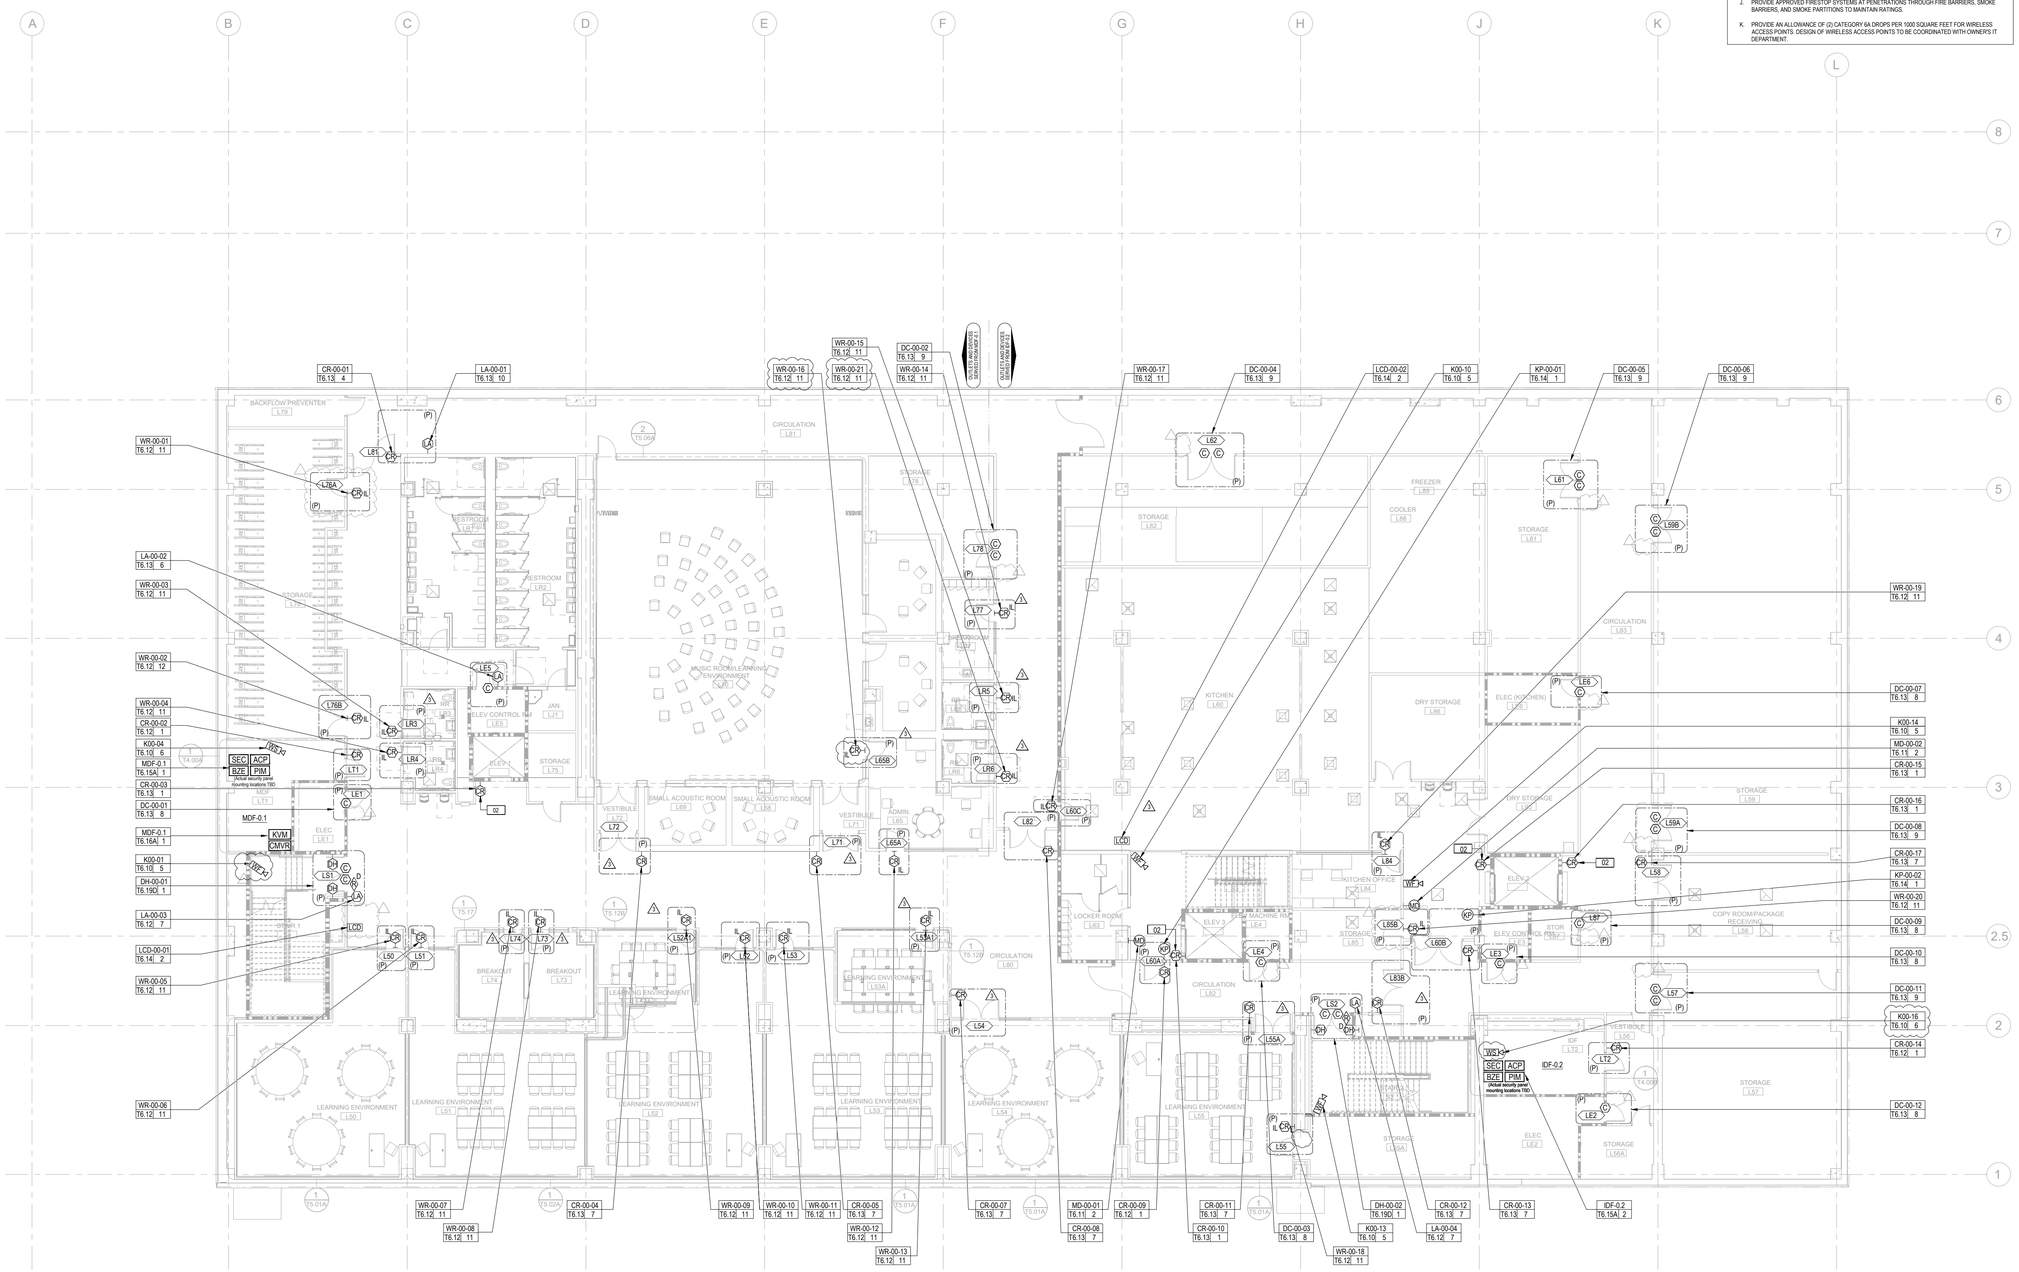

REV	DATE	DESCRIPTION
	05/17/2024	90% DESIGN DEVELOPMENT
	06/17/2024	100% DESIGN DEVELOPMENT
	09/16/2024	50% CONSTRUCTION DOCUMENTS
1	09/16/2024	ADDENDUM 1 - ISSUED FOR PERMIT
2	04/15/2025	90% CONSTRUCTION
3	04/15/2025	ISSUED FOR CONSTRUCTION
4	06/20/2025	DYNAMIC SECURITY PLANS

CONSULTANT LOGO

TEECOM
55 California Street
Suite 1500
San Francisco, CA
94115
(510) 417 2800
www.teecom.com

STAMP

DBE STAMP

ST. IGNATIUS COLLEGE PREPARATORY
2001 37th Ave, San Francisco, CA 94116

SECTOR FLOOR PLAN - LOWER LEVEL (NORTH)

1/8" = 1'-0"

T2.10B

7/31/2025 9:58:04 PM