NUMBERED NOTES

01	INFRASTRUCTURE TO SUPPORT FUTURE PROJECTOR.
02	HALL CALL ELEVATOR CARD READER CONTROL
03	WALL OUTLET FOR MECHANICAL CONTROLS PANEL.

SHEET NOTES

A. REFER TO SHEET T0.01 FOR ABBREVIATIONS, GENERAL NOTES, AND SYMBOL DEFINITIONS.

B. REFER TO SHEET T0.02 FOR PRIMARY PATHWAY REQUIREMENTS AND DEFINITIONS.

C. REFER TO SHEET T0.03 AND T0.04 FOR OUTLETS/DEVICES SECONDARY PATHWAY AND CABLING REQUIREMENTS.


D. SERVE OUTLETS/DEVICES ON THIS SHEET FROM TELECOM ROOMS AS NOTED.

E. REFER TO SECURITY INSTALLATION DETAILS FOR SECONDARY PATHWAY REQUIREMENTS, SYSTEM INTERFACES, AND COMPONENT CONFIGURATIONS.

F. INSTALL SECONDARY PATHWAYS ALONG THE MOST DIRECT ROUTES TO PRIMARY PATHWAYS OR SERVING ROOM.

G. INSTALL HORIZONTAL CABLES ALONG THE MOST DIRECT PRIMARY PATHWAY ROUTE TO THE SERVING TELECOM ROOM.

H. PROVIDE APPROVED FIRESTOP SYSTEMS AT PENETRATIONS THROUGH FIRE BARRIERS, SMOKE BARRIERS, AND SMOKE PARTITIONS TO MAINTAIN RATINGS.

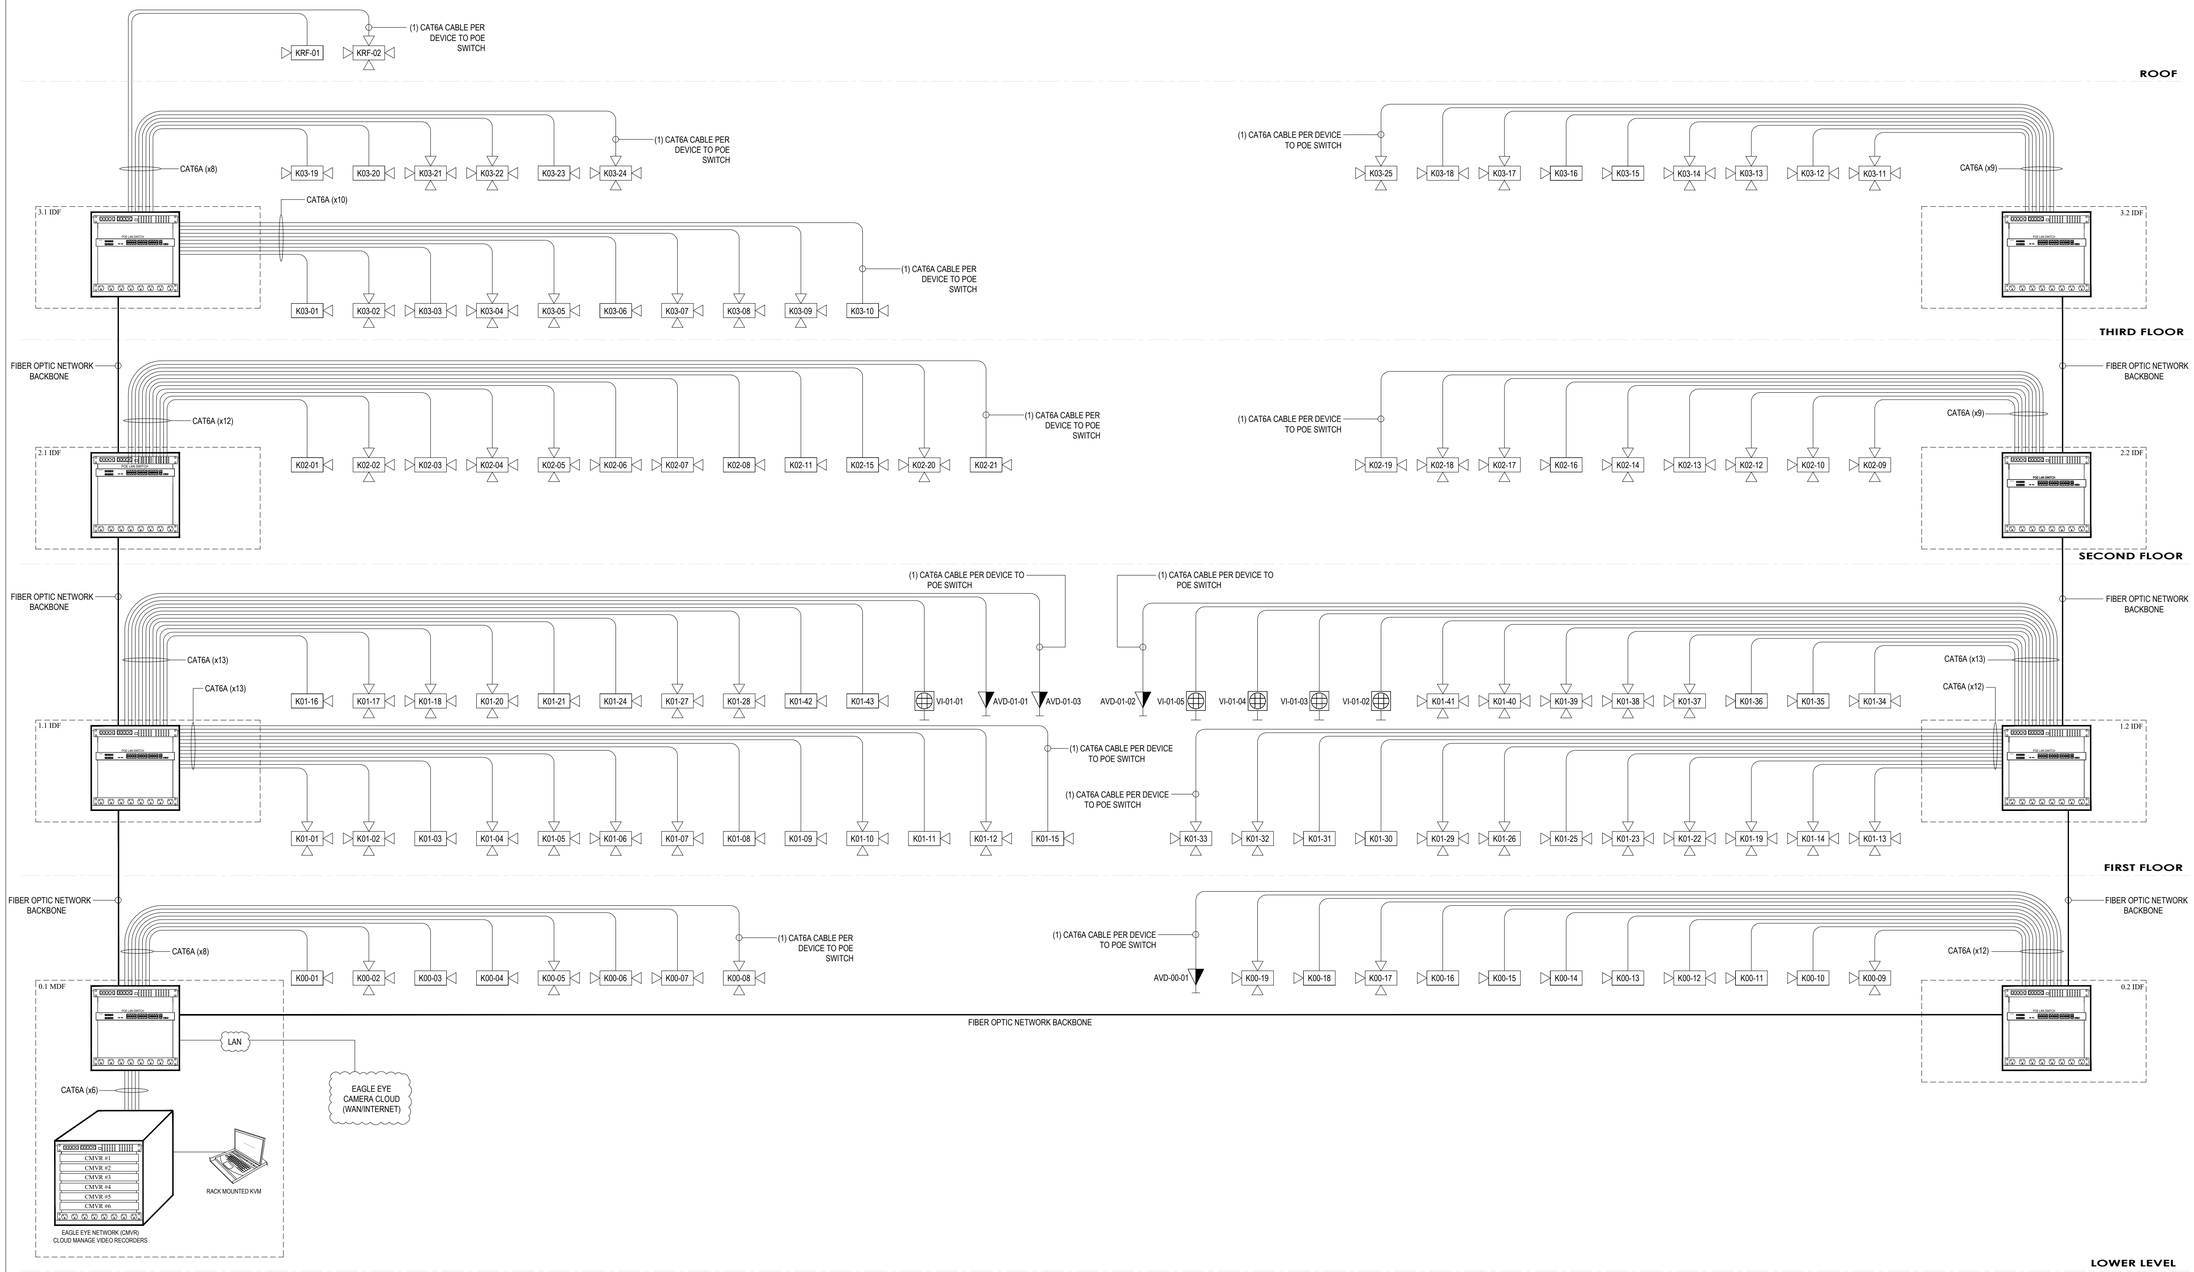

A- CAMERA SYSTEM RISER DIAGRAM

SCALE: N.T.S

7/1/2026 4:26:04 PM

SAINT IGNATIUS COLLEGE PREPARATORY

STAMP

CONSULTANT LOGO

TEECOM
51 Colifornia Street
Suite 1540
San Francisco, CA
94111
(510) 227 2850
www.teecom.com

DBI STAMP

REV	DATE	DESCRIPTION
	07/02/26	DYNAMIC DESCRIPTI FLAGS

ST. IGNATIUS COLLEGE PREPARATORY

2001 37th Ave, San Francisco, CA 94116

CAMERA SYSTEM RISER DIAGRAM

1/8" = 1'-0"

N

T6.07